



**EUROTHERM
DRIVES**

Profibus-DP Communications Interface For 590/620

Technical Manual

HA467329U001 Issue 1

© Copyright Eurotherm Drives Limited 2000

All rights strictly reserved. No part of this document may be stored in a retrieval system, or transmitted in any form or by any means to persons not employed by a Eurotherm group company without written permission from Eurotherm Drives Ltd.

Although every effort has been taken to ensure the accuracy of this document it may be necessary, without notice, to make amendments or correct omissions. Eurotherm Drives cannot accept responsibility for damage, injury, or expenses resulting therefrom.

Safety Information



Please read this information **BEFORE** installing the equipment.

Intended Users

This manual is to be made available to all persons who are required to install, configure or service equipment described herein, or any other associated operation.

The information given is intended to highlight safety issues, and to enable the user to obtain maximum benefit from the equipment.

Application Area

The equipment described is intended for industrial motor speed control.

Personnel

Installation, operation and maintenance of the equipment should be carried out by qualified personnel. A qualified person is someone who is technically competent and familiar with all safety information and established safety practices; with the installation process, operation and maintenance of this equipment; and with all the hazards involved.

REFER TO YOUR MAIN PRODUCT MANUAL FOR SPECIFIC SAFETY INFORMATION ABOUT THE DEVICE YOU ARE CONTROLLING

Contents

Contents

Page

PROFIBUS-DP COMMUNICATIONS INTERFACE	1
Product Code	1
Product Features	2
Installation	3
590.....	3
620.....	3
Connection	4
590.....	4
Terminals	4
620.....	4
Terminal Block TBA - Drive Connection	5
Terminal Block TBB - Ground Connection.....	5
Terminal Block TBC - Profibus Connection.....	5
• Screening and Grounding.....	6
Bus Termination	6
Repeater	6
Drive Set-Up	7
590.....	7
• PROTOCOL	7
• OPTION ADDRESS	7
• OPTION VERSION	7
620.....	7
• P3/P1 BAUD RATE	7
• OPTION ADDRESS	7
• OPTION VERSION.....	8
Configuration	9
590.....	9
620.....	9
Identification Number (Ident_Number)	9
Configuration Data (Cfg_Data)	9
User Parameter Data (Usr_Prm_Data)	10
Demand Data Protocol	12
Command.....	12
Parameter Tag Number	13
Value / Error Code	13
Performance	14
Troubleshooting	15
Status LEDs.....	15
External Communications Fault	15
Configuration Fault.....	15
Internal Communications Fault.....	15

Contents

<i>Contents</i>	<i>Page</i>
620 Only	15
620 and 590 Device Data Base (DDB) File	16
Decimal To Hexadecimal Conversion.....	17

PROFIBUS-DP COMMUNICATIONS INTERFACE

Product Code

590 DC Drive:

Factory fitted:

590Cxxxx/x/x/x/x/3/xx/xxx

591Cxxxx/x/x/x/x/3/xx/xxx

As a field installable option: LA467108U001 (includes AH467328U001)

620 External accessories:

6204/2

2

Product Features

PROFIBUS-DP (DIN 19245 - 3) compliance tested.

Connection using shielded twisted -pair.

Auto-Baud search 9.6/19.2/93.75/187.5/500/1500kBaud.

Maximum of 15 Process Data parameters, selected from any of the Drives' parameters.

Process Data parameters selected by PROFIBUS-DP-Master.

Demand Data protocol to provide random access to any parameter within the Drive.

LEDs to indicate board and communications status.

Suitable for use with:

590 software V4.3 onwards

620 software V4.8 onwards

Installation

590

The PROFIBUS-DP-SLAVE Option Board is fitted on the site at the bottom right-hand corner of the Drive Control Board. Note that this option board is fitted instead of the Serial Link Option Board.

620


The 6204/2 PROFIBUS-DP-SLAVE Option Module is mounted on a terminal rail externally from the drive and in a separate enclosure.

WARNING! DO NOT INSTALL OR REMOVE THE OPTION BOARD WITH THE DRIVE POWERED.

Connection

590

The 6-pin Phoenix connector is used to connect to the Profibus network.

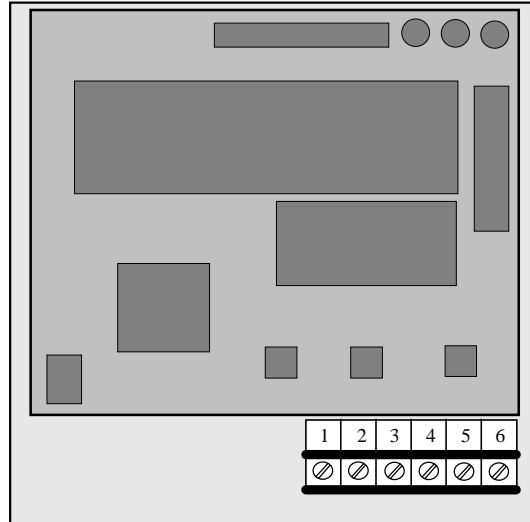


Terminals

Pin	Reference	Meaning
1	0Vext	Signal reference for Profibus
2	+5VDCext	+5VDCext/50mA supply for Profibus
3	B-B'	Receive/Transmit-Data-P
4	A-A'	Receive/Transmit-Data-N
5	RTS	For connecting repeater
6	0Vext	As pin 1

620

The 6204/2 has three terminal blocks - TBA, TBB and TBC. TBA is for making connections to the drive; TBB is for making ground connections and TBC is for making connections to the Profibus communications network.

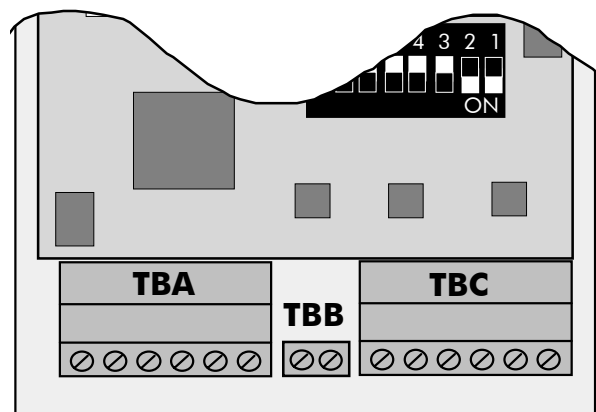

Terminal Block TBA - Drive Connection

Terminal no.	Reference	Description
1	RXA	Receive data A from drive
2	RXB	Receive data B from drive
3	TXB	Transmit data B to drive
4	TXA	Transmit data A to drive
5	0V	Power supply return
6	VCC	Power supply input

Terminal Block TBB - Ground Connection

Terminal no.	Reference	Description
1	GND	EMC ground
2	GND	Profibus cable screen

Terminal Block TBC - Profibus Connection


Terminal no.	Reference	Description
1	0Vext	Signal reference for Profibus
2	+5VDCext	+5VDCext / 50mA supply for Profibus
3	B-B'	Receive / Transmit - Data - P
4	A-A'	Receive / Transmit - Data - N
5	RTS	For connecting repeater
6	0Vext	Signal reference for Profibus

Signal Name	620 Terminal Number	Profibus Module Terminal Number	
TX-	P1.1	TBA.1	} pair 1
TX+	P1.2	TBA.2	
RX-	P1.3	TBA.3	} pair 2
RX+	P1.4	TBA.4	
0V	External 24v supply	TBA.5	} pair 3
+24V		TBA.6	

These connections should be made with twisted pairs as shown, each less than 1 metre in length.


Screening and Grounding

Connect cable screens as shown below (repeat for all wire pairs):-

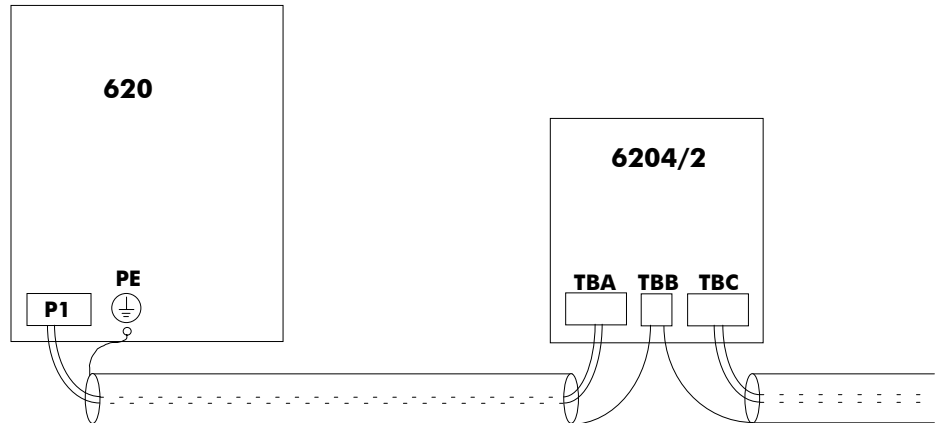

Bus Termination

Enabled by setting switches 1 and 2 to ON (Note - switches 3 to 8 are not used.)

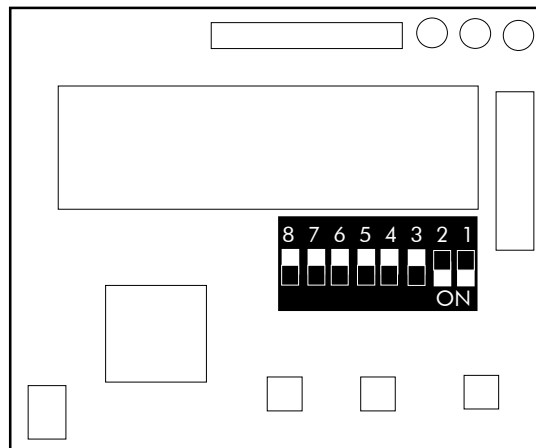

Repeater

Terminal 5 (Terminal Block TBC on the 620) provides a TTL level signal that can be connected to a repeater. Most repeaters automatically switch between transmitting and receiving, so do not need this connection. The pin in high whilst transmitting.

Drive Set-Up

590

There are three parameters associated with the Profibus Option. These are:

PROTOCOL
 OPTION ADDRESS
 OPTION VERSION

All parameters are in the SERIAL LINKS::MAIN PORT (P1) menu of the MMI.

PROTOCOL

The PROTOCOL parameter must be set to OPTION.

Note - when set to OPTION, the BAUD RATE parameter is ignored.

OPTION ADDRESS

The OPTION ADDRESS parameter is used to specify the PROFIBUS-DP-SLAVE address for the Drive.

Valid addresses need to be in the range 1 to 125.

If the OPTION ADDRESS parameter is changed, the Drive must be powered off then on before the Drive will respond to the new address.

OPTION VERSION

The OPTION VERSION parameter is a diagnostic which shows the version number of the PROFIBUS board. If no board is fitted, 0.00 is displayed.

620

Note if using the 620 COM the Profibus card should be connected to P1. There are four parameters associated with the Profibus Option. These are:

SERIAL LINKS
 PORT P3
 P3 MODE
 P3 BAUD RATE
 EI ASCII
 OPTION ADDRESS
 OPTION VERSION
 PORT P1 (620 COM)
 P1 MODE
 P1 BAUD RATE

P3 MODE can be found in the SERIAL LINKS:: menu. It must be set to FIELD BUS.

P3/P1 BAUD RATE

BAUD RATE can be found in the SERIAL LINKS:: menu. 38400 baud is recommended. Other rates can be selected, but performance of the Profibus link may suffer.

OPTION ADDRESS

The OPTION ADDRESS parameter is used to specify the PROFIBUS-DP-SLAVE address for the Drive. It can be found in the SERIAL LINKS::EI ASCII menu.

Valid PROFIBUS addresses are in the range 1 to 125.

If the OPTION ADDRESS parameter is changed, the Drive must be powered off and then on before the Drive will respond to the new address.

OPTION VERSION

OPTION VERSION is a diagnostic which shows the version number of the PROFIBUS board. It can be found in the SERIAL LINKS::EI ASCII menu. If no board is fitted, 0.00 is displayed.

To enable the Demand Data feature, the first byte of Cfg_Data is set to 0x73 (115 decimal). The number of Inputs and Outputs in the Process Data is defined by setting bytes to either 0x50 (80 decimal) or 0x60 (96 decimal).

Index (No Demand Data)	Index (With Demand Data)	Identifier Byte (Hexadecimal)	Action
-	0	0x73	Enable Demand Data
0	1	0x50	Read 1st Parameter
		0x60	Write 1st Parameter
1	2	0x50	Read 2nd Parameter
		0x60	Write 2nd Parameter
etc	etc	etc	etc
11	12	0x50	Read 12th Parameter
		0x60	Write 12th Parameter

For example:

Index	Data	Meaning
0	0x50	1st Parameter Input (No Demand Data)
1	0x50	2nd Parameter Input
2	0x60	3rd Parameter Output
3	0x60	4th Parameter Output

The supported Identifier Byte formats are defined by the Profibus Standard to have the following meaning:

Identifier	Input/Output	Length	Format	Consistency
0x50	Input	1	Word	None
0x60	Output	1	Word	None
0x73	In and Out	4	Word	None

Note - all parameter values are transferred as Words (2 octets).

User Parameter Data (Usr_Prm_Data)

The Usr_Prm_Data is used to specify the Tag numbers of the parameters that are to be read or written as Process Data. Each parameter is represented by 2 bytes in the Usr_Prm_Data, these specify the Tag number in High-Byte/Low-Byte order.

The first 3 bytes of the Usr_Prm_Data are reserved for the future implementation of the DPV1 Profibus extensions. These must be set to zero. The High-Byte of the first Tag number must be in the 4th byte.

The Usr_Prm_Data must always be 33 Bytes long. If less than 15 parameters are to be included in the Process Data then the terminating Tag number must be 0 (Zero).

The number of Tags must match the number of Inputs and Output that are declared to be in the Process Data by the Cfg_data.

Index	Data	Parameter
0	0	Reserved for DPV1
1	0	
2	0	
3	High-Byte	1st
4	Low-Byte	
5	High-Byte	2nd
6	Low-Byte	
7	High-Byte	3rd
8	Low-Byte	
etc	etc	etc
31	High-Byte	15th
32	Low-Byte	

For example:

Index	Data (Hexadecimal)	Parameter
0	0	Reserved
1	0	
2	0	
3	0x00	Tag Number 55
4	0x37	
5	0x00	Tag Number 56
6	0x38	
7	0x01	Tag Number 288
8	0x20	
9	0x00	Terminate
10	0x00	

Demand Data Protocol


Demand Data is a sub-protocol using the first 8 bytes (octets) in both the request and response message of the cyclic Data Exchange. It allows random read/write access to any parameter within the Drive. It is enabled by the Profibus-DP- Master setting the first byte of the Cfg_Data to 0x73. (See page 9 for Configuration.)

The sub-protocol consists of 3 parts:

Command

Parameter reference (Tag Number)

Parameter value or error code

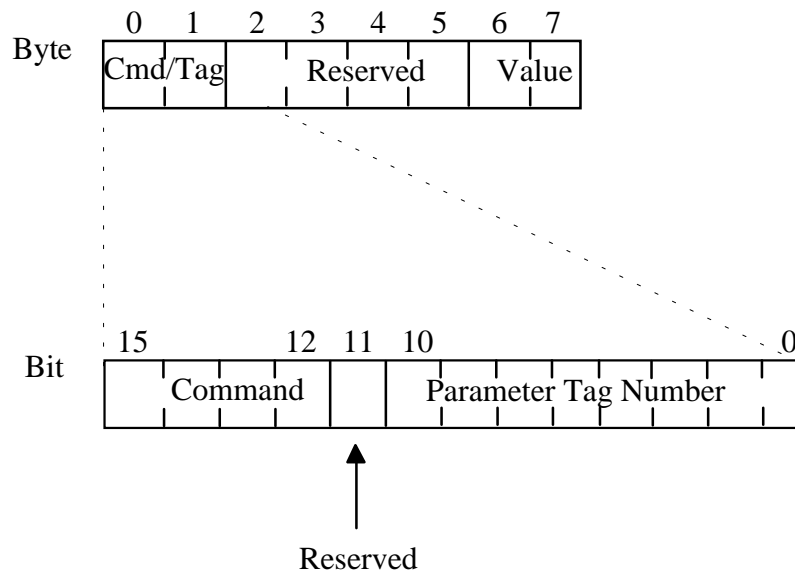

Command

The command field in the request message selects the required operation. This is either None, Read or Write.

The command field in the response message either confirms that no operation has been requested, indicates that a Read or Write request has been completed successfully or indicates that a Read or Write request has failed.

Valid values for the command field are:

Command	Request (Master to Slave)	Response (Slave to Master)
0	No Command	Acknowledge No Command
1	Read Request	Acknowledge Transfer
2	Write Request	--
7	--	Reject Request

The valid Request/Response command pairs are:

Request Command	Response Command
0	0
1	1 or 7
2	1 or 7

Parameter Tag Number

The Parameter Tag Number is the unique reference to a parameter within the Drive. These are listed in the 590 and 620 Product Manuals.

Value / Error Code

The Value/Error Code field is used to receive a Read value, send a Write value or receive an error code.

The Value is a signed or unsigned 16-bit integer. The scaling for each parameter is described in the Product Manual for the host Drive.

If the Response Command is 7, i.e. the request has been rejected, this field contains the error code.

These are:

Error Code	Meaning
0	Invalid Tag Number
1	Read Only Parameter
2	Value Under/Over-Range

Performance

The Eurotherm implementation of Profibus for existing products uses an internal (serial) communications link between the Profibus Communications Interface processor and the main Drive processor. This introduces additional delays in the reading and writing of parameters. The refresh rate between the processors are summarised in this section. These delays are independent from the Profibus communications cycle time which is controlled by the Profibus Master.


The refresh rate of parameters depends upon the number of parameters being read and written using the cyclic Data Exchange.

Number of Parameters	Cycle Time (ms)	
	590	620
1	15	8
2	20	11
3	24	14
4	28	17
5	32	20
6	36	23
7	40	26
8	44	29
9	54	34
10	58	37
11	62	40
12	66	43
13	70	46
14	76	49
15	80	52

Troubleshooting

Status LEDs

The PROFIBUS option board has three LEDs to indicate status.

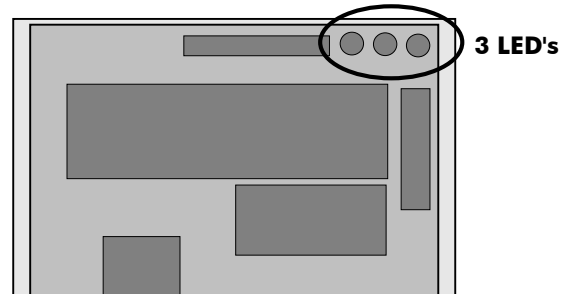

Status			Meaning
BUS (Yellow)	ERROR (Red)	RUN (Green)	
	Flashing	Flashing	Internal Fault
	ON	Flashing	External Fault
	OFF	Flashing	Normal Operation
ON			Profibus Data Exchange
OFF			No Profibus Data Exchange

External Communications Fault

- Check the terminal connections. (See page 4, Connection).
- Check that the Profibus-DP Master is communicating at 12Mbaud or less.
- Check that the OPTION ADDRESS parameter contains the correct Profibus-DP Slave address. (See page 7, Drive Set-Up).
- Check that no other Profibus-DP Slave or Master has the same address.

Configuration Fault

- Check that the Usr_Prm_Data has been declared correctly in the Profibus-DP Master, (See page 9, Configuration).
- Check that the Cfg_Data has been declared correctly in the Profibus-DP Master. (See page 9, Configuration).
- If possible, read the DP-Slave diagnostic information into the Profibus-DP Master. The station status bytes will probably indicate where the problem is.

Internal Communications Fault

- Check that the PROTOCOL parameter is set to OPTION (for the 620 FIELD BUS). (See page 7, Drive Set-Up).
- Check that the OPTION ADDRESS parameter is set to a value between 0 and 125

620 Only

- Check the connections between the Profibus and the main drive processor.

620 and 590 Device Data Base (DDB) File

The Device Data Base File (EURO3245.GSD) for the Eurotherm Profibus-DP Option is as follows:

```

.....
#Profibus_DP
Vendor_Name="EUROTHERM Drives"
Model_Name="Eurotherm 620,590"
Revision = "Revision_1"
Ident_Number = 0x3245
Protocol_Ident = 0
Station_Type = 0 ;DP-Slave
FMS_supp = 0
Hardware_Release = "HW_V1.0"
Software_Release = "SW_V1.20"
9.6_supp = 1
19.2_supp = 1
93.75_supp = 1
187.5_supp = 1
500_supp = 1
1.5M_supp = 1
3M_supp = 1
6M_supp = 1
12M_supp = 1
MaxTsdr_9.6 = 60
MaxTsdr_19.2 = 60
MaxTsdr_93.75 = 60
MaxTsdr_187.5 = 60
MaxTsdr_500 = 100
MaxTsdr_1.5M = 150
MaxTsdr_3M = 250
MaxTsdr_6M = 450
MaxTsdr_12M = 800
Redundancy = 0
Repeater_Ctrl_Sig = 2 ;TTL
24V_Pins = 0
Implementation_Type = "ASIC_solution"
Slave_Family = 1 ; Drives family
Bitmap_Device = "EUR0590"
Bitmap_Diag = "EUR0590D"
Bitmap_SF = "EUR0590"
Freeze_Mode_supp = 1
Sync_Mode_supp = 1
Auto_Baud_supp = 1
Set_Slave_Add_supp = 0
User_Prm_Data_Len = 33
User_Prm_Data=0x00,0x00,0x00,0x00,0x00,0x00,0x00,0x00,0x00,0x00,0x00,0x00,\
0x00,0x00,0x00,0x00,0x00,0x00,0x00,0x00,0x00,0x00,0x00,0x00,0x00,\
0x00,0x00,0x00,0x00,0x00
Min_Slave_Intervall = 20
Modular_Station = 1
Max_Module = 16
Max_Input_Len = 38
Max_Output_Len = 38
Max_Data_Len = 46
Module = "Process Data Read" 0x50 ; 1 word input
EndModule
Module = "Process Data Write" 0x60 ; 1 word output
EndModule
Module = "Demand Data" 0x73 ; 4 words input/output
EndModule
;
;== END OF FILE ==


```


Decimal To Hexadecimal Conversion

Some Profibus Master configuration tools require data to be entered in hexadecimal. The Tag numbers given in the 590 and 620 Product manuals are in decimal. The following table is provided for quick conversion.

	0	1	2	3	4	5	6	7	8	9
0	0	1	2	3	4	5	6	7	8	9
10	A	B	C	D	E	F	10	11	12	13
20	14	15	16	17	18	19	1A	1B	1C	1D
30	1E	1F	20	21	22	23	24	25	26	27
40	28	29	2A	2B	2C	2D	2E	2F	30	31
50	32	33	34	35	36	37	38	39	3A	3B
60	3C	3D	3E	3F	40	41	42	43	44	45
70	46	47	48	49	4A	4B	4C	4D	4E	4F
80	50	51	52	53	54	55	56	57	58	59
90	5A	5B	5C	5D	5E	5F	60	61	62	63
100	64	65	66	67	68	69	6A	6B	6C	6D
110	6E	6F	70	71	72	73	74	75	76	77
120	78	79	7A	7B	7C	7D	7E	7F	80	81
130	82	83	84	85	86	87	88	89	8A	8B
140	8C	8D	8E	8F	90	91	92	93	94	95
150	96	97	98	99	9A	9B	9C	9D	9E	9F
160	A0	A1	A2	A3	A4	A5	A6	A7	A8	A9
170	AA	AB	AC	AD	AE	AF	B0	B1	B2	B3
180	B4	B5	B6	B7	B8	B9	BA	BB	BC	BD
190	BE	BF	C0	C1	C2	C3	C4	C5	C6	C7
200	C8	C9	CA	CB	CC	CD	CE	CF	D0	D1
210	D2	D3	D4	D5	D6	D7	D8	D9	DA	DB
220	DC	DD	DE	DF	E0	E1	E2	E3	E4	E5
230	E6	E7	E8	E9	EA	EB	EC	ED	EE	EF
240	F0	F1	F2	F3	F4	F5	F6	F7	F8	F9
250	FA	FB	FC	FD	FE	FF	100	101	102	103
260	104	105	106	107	108	109	10A	10B	10C	10D
270	10E	10F	110	111	112	113	114	115	116	117
280	118	119	11A	11B	11C	11D	11E	11F	120	121

	0	1	2	3	4	5	6	7	8	9
290	122	123	124	125	126	127	128	129	12A	12B
300	12C	12D	12E	12F	130	131	132	133	134	135
310	136	137	138	139	13A	13B	13C	13D	13E	13F
320	140	141	142	143	144	145	146	147	148	149
330	14A	14B	14C	14D	14E	14F	150	151	152	153
340	154	155	156	157	158	159	15A	15B	15C	15D
350	15E	15F	160	161	162	163	164	165	166	167
360	168	169	16A	16B	16C	16D	16E	16F	170	171
370	172	173	174	175	176	177	178	179	17A	17B
380	17C	17D	17E	17F	180	181	182	183	184	185
390	186	187	188	189	18A	18B	18C	18D	18E	18F
400	190	191	192	193	194	195	196	197	198	199
410	19A	19B	19C	19D	19E	19F	1A0	1A1	1A2	1A3
420	1A4	1A5	1A6	1A7	1A8	1A9	1AA	1AB	1AC	1AD
430	1AE	1AF	1B0	1B1	1B2	1B3	1B4	1B5	1B6	1B7
440	1B8	1B9	1BA	1BB	1BC	1BD	1BE	1BF	1C0	1C1
450	1C2	1C3	1C4	1C5	1C6	1C7	1C8	1C9	1CA	1CB
460	1CC	1CD	1CE	1CF	1D0	1D1	1D2	1D3	1D4	1D5
470	1D6	1D7	1D8	1D9	1DA	1DB	1DC	1DD	1DE	1DF
480	1E0	1E1	1E2	1E3	1E4	1E5	1E6	1E7	1E8	1E9
490	1EA	1EB	1EC	1ED	1EE	1EF	1F0	1F1	1F2	1F3
500	1F4	1F5	1F6	1F7	1F8	1F9	1FA	1Fb	1FC	1FD
510	1FE	1FF	200	201	202	203	204	205	206	207
520	208	209	20A	20B	20C	20D	20E	20F	210	211
530	212	213	214	215	216	217	218	219	21A	21B
540	21C	21D	21E	21F	220	221	222	223	224	225
550	226	227	228	229	22A	22B	22C	22D	22E	22F

ISS.	MODIFICATION	ECN No.	DATE	DRAWN	CHK'D
1	Initial Issue of HA467329U001	13635	31.01.00	FEP	
FIRST USED ON		MODIFICATION RECORD Profibus-DP Slave Communications Interface Product Manual			
 EUROTHERM DRIVES		DRAWING NUMBER ZZ467329C001			SHT. 1 OF 1